

High Performance - LED Hi Bay Luminaires



Features

- IP65 Protection
- Black Anodised Aluminium Body
- Aluminium Spun Reflector
- Integrated LED driver on Aluminium Heatsink
- Flexible 3 core cable and IP65 gland
- 45° or 120° beam angle

Applications:

- Aircraft Hangers
- Factories
- Garages
- Warehouses
- Cold Stores
- Sports Halls
- Loading Bays
- Supermarkets
- Shopping Malls
- Tunnels
- Workshops



Description—U-HB Hi Bay Lights

The Uni-light U-HB Hi-Bay lights are a range of High Performance Lights for Industrial and Commercial applications. Supplied with a robust aluminium body, heatsink and screw-in suspension eye the Unilight HiBay lights will replace Sodium, Mercury Vapour and Metal Halide units providing up to 60% more light than traditional units for similar power consumption.

The range extends from 100W to 240W and will satisfy the majority of applications. U-HB is IP65 rated ensuring its suitability for demanding conditions within warehouses, stores, workshops, garages, tunnels, cold stores, factory production areas and other industrial applications. Each unit has a short length of flex requiring only a simple waterproof or dust-proof connector to be supplied before use.

LED technology ensures that light with no UV, no Infra Red radiation, and no mercury or lead content is supplied. The U-HB is fully CE and RoHS compliant.

High Performance - LED Hi Bay Luminaires

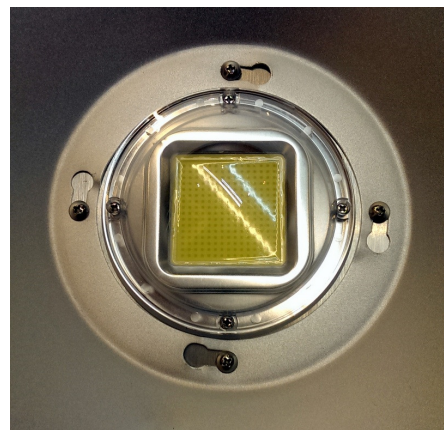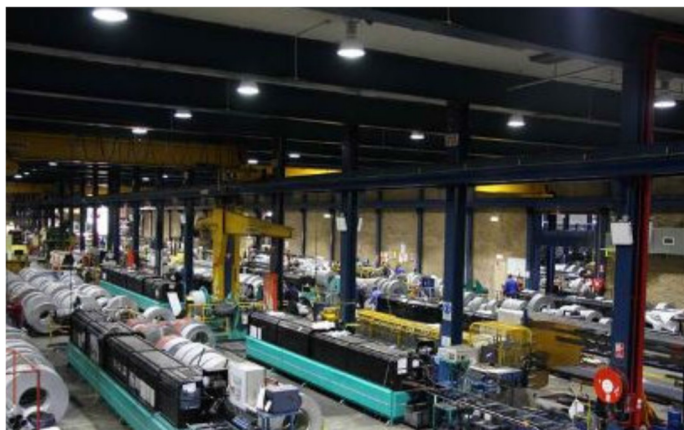

Specification - UL-HB HiBay

Order Codes	U-HB-100W-6K	U-HB-120W-6K	U-HB-150W-6K	U-HB-200W-6K	U-HB-250W-6K
IP rating	IP65	IP65	IP65	IP65	IP65
Nominal Watts	100	120	150	200	240
Lumen/W	95	95	95	95	95
Colour Temp k	6000	6000	6000	6000	6000
Beam Angle	45 or 120	45 or 120	45 or 120	45 or 120	45 or 120
Life time hrs	50000	50000	50000	50000	50000
Weight kg	8.5	8.5	8.5	14.5	14.5
Operating Temp	-35°C to 55°C	-35°C to 55°C	-35°C to 55°C	-35°C to 55°C	-35°C to 55°C
Width (body) mm	310	310	310	310	310
Height (body) mm	360	360	360	360	360
Warranty yrs	5	5	5	5	5

Head Office :Sweden:
Rep. Office., UK

Tel: +46 (0)70 290 1075, email:nfo@unilightled.com
Tel +44 (0) 1285 652028 email :sales-uk@uni-lightled.com
www.uni-lightled.com